


开槽端子

Slotted terminal

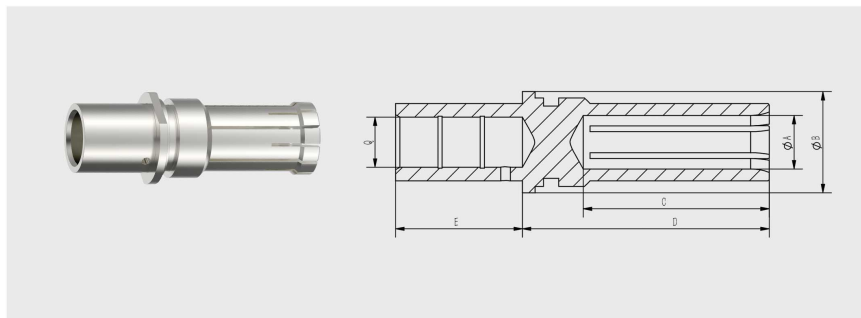

物料号 Part number	尺寸 Dimensions						机械数据 Mechanical Data		电气数据 Electrical Data	
	ØA mm	ØB mm	C mm	D mm	E mm	Q mm²	插入力 Mating force N	拔出力 Demating force N	额定电流 Nominal current A	接触电阻 Contact resistance μΩ
TU03C00400	3	6.2	15.5	20	12	4	5	2.5	40	400
TU04C00600	4	7.2	17	23	13	6	6	3	55	300
TU05C01000	5	8.2	19	26	14.5	10	7	3.5	75	200
TU06C01600	6	9.2	21.2	29.2	15	16	8	4	100	175
TU08C02500	8	11.2	23	33	16	25	10	5	125	150
TU10C03500	10	13.2	25.2	37	17	35	12	6	165	125
TU12C07000	12	16.2	27.2	41	18	70	14	7	250	100

备注:


- 1.尺寸参数仅供参考，以用户的实际工作条件为准；
- 2.尾部接线模式可定制。

Remarks:

- 1.The dimension parameters are for reference only, subject to the user's actual working conditions;
- 2.Tail wiring mode can be customized.

插针数据

Pin data

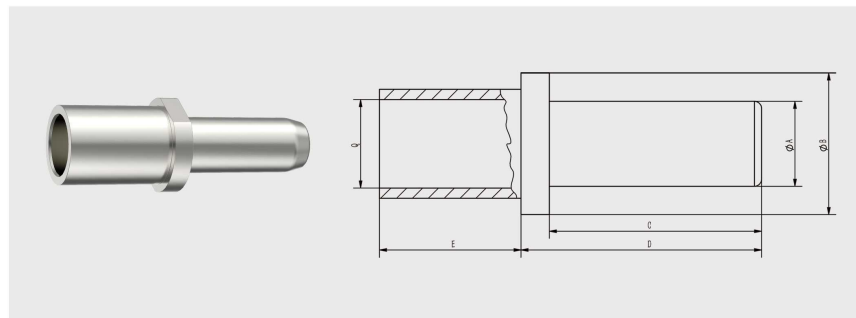

物料号 Part number	尺寸 Dimensions					
	ØA mm	ØB mm	C mm	D mm	E mm	Q mm²
PN03C00400	3	6.2	13.5	15.5	12	4
PN04C00600	4	7.2	15	17	13	6
PN05C01000	5	8.2	17	19	14.5	10
PN06C01600	6	9.2	19.2	21.2	15	16
PN08C02500	8	11.2	21	24	16	25
PN10C03500	10	13.2	24.2	27.2	17	35
PN12C07000	12	16.2	25.2	28.2	18	70


备注:

- 1.尺寸参数仅供参考，以用户的实际工作条件为准；
- 2.尾部接线模式可定制。

Remarks:

- 1.The dimension parameters are for reference only, subject to the user's actual working conditions;
- 2.Tail wiring mode can be customized.

片簧端子 Sliced terminal

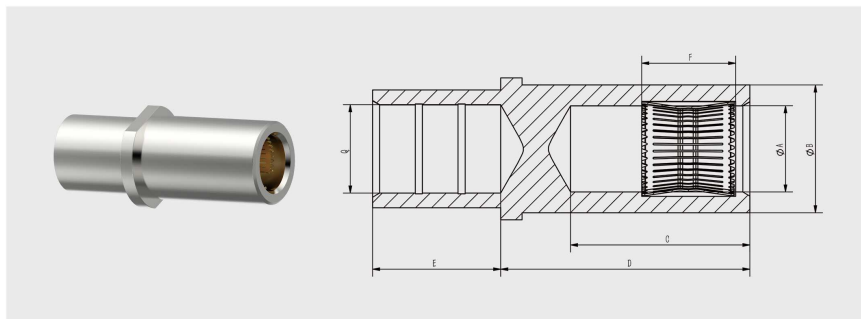

物料号 Part number	尺寸 Dimensions							机械数据 Mechanical Data		电气数据 Electrical Data		
	ØA mm	ØB mm	C mm	D mm	E mm	Q mm ²	F mm	插入力 Mating force N	拔出力 Demating force N	额定电流 Nominal current A	瞬时电流 Surge current kA	接触电阻 Contact resis- tance µΩ
LA03C00400	3	8	15	17	12	4	13	6	6	35	5	350
LA04C00600	4	9	15	17	13	6	13	7	7	40	8	300
LA05C01000	5	11	19	21	14.5	10	13	11	8	50	12	250
LA06C01600	6	12	24	27	15	16	13	12	9	60	19	170
LA08C02500	8	15	24	27	16	25	13	13	11	90	26	120
LA10C03500	10	17	24	27	17	35	13	14	12	120	27	100
LA12C07000	12	19	36	40	18	70	13	15	13	250	35	80
LA14C09500	14	21	36	40	20	95	13	17	14	300	42	75
LA16C12000	16	23	36	40	21	120	13	18	15	350	48	70
LA18C15000	18	25	40	45	22	150	13	19	17	400	52	60
LA20C24000	20	27	40	45	23	240	13	20	18	600	56	50


备注:

- 1.尺寸参数仅供参考,以用户的实际工作条件为准;
- 2.尾部接线模式可定制。

Remarks:

- 1.The dimension parameters are for reference only, subject to the user's actual working conditions;
- 2.Tail wiring mode can be customized.

插针数据 Pin data

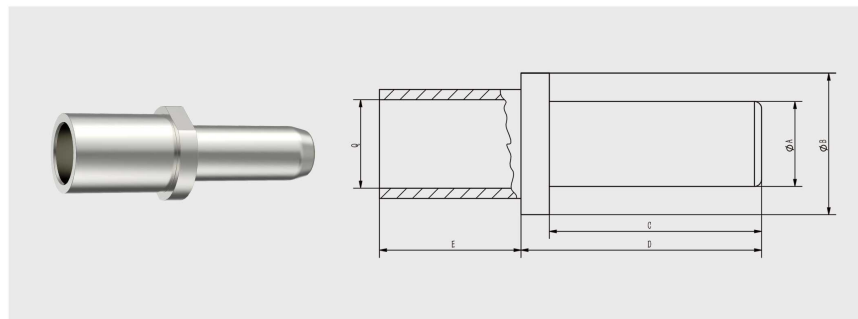

物料号 Part number	尺寸 Dimensions					
	ØA mm	ØB mm	C mm	D mm	E mm	Q mm ²
PN03C00400	3	11	18	20	12	4
PN04C00600	4	12	18	20	13	6
PN05C01000	5	14	21	23	14.5	10
PN06C01600	6	15	27	29	15	16
PN08C02500	8	18	27	29	16	25
PN10C03500	10	20	27	29	17	35
PN12C07000	12	23	39	42	18	70
PN14C09500	14	25	39	42	20	95
PN16C12000	16	27	39	42	21	120
PN18C15000	18	29	43	46	22	150
PN20C24000	20	31	43	46	23	240


备注:

- 1.尺寸参数仅供参考,以用户的实际工作条件为准;
- 2.尾部接线模式可定制。

Remarks:

- 1.The dimension parameters are for reference only, subject to the user's actual working conditions;
- 2.Tail wiring mode can be customized.

片式端子 Stacked terminal

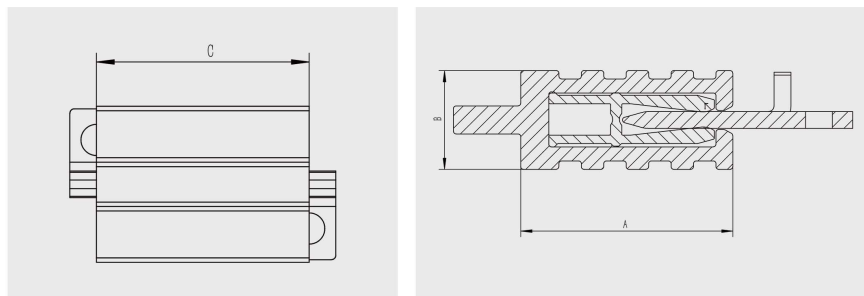

物料号 Part number	尺寸 Dimensions			电气数据 Electrical Data	
	A	B	C	额定电流 Nominal current A	接触电阻 Contact resistance $\mu\Omega$
ST05B00500	38	18	14	150	72
ST07B00500	38	18	18	210	52
ST09B00500	38	18	22	270	42
ST10B00500	38	18	24	300	35
ST12B00500	38	18	28	360	30
ST15B00500	38	18	34	450	25
ST18B00500	38	18	40	540	22
ST21B00500	38	18	46	630	19
ST24B00500	38	18	52	720	17
ST27B00500	38	18	58	810	15
ST30B00500	38	18	64	900	13
ST33B00500	38	18	70	1000	11


备注:

- 1.尺寸参数仅供参考，以用户的实际工作条件为准；
- 2.尾部接线模式可定制。

Remarks:

- 1.The dimension parameters are for reference only, subject to the user's actual working conditions;
- 2.Tail wiring mode can be customized.

片式端子 Stacked terminal

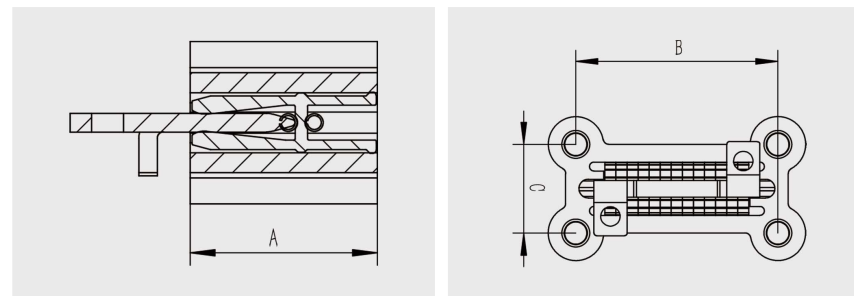

物料号 Part number	尺寸 Dimensions			电气数据 Electrical Data	
	A	B	C	额定电流 Nominal current A	接触电阻 Contact resistance $\mu\Omega$
ST13B00501	30	36.5	16	300	40


备注:

- 1.尺寸参数仅供参考，以用户的实际工作条件为准；
- 2.尾部接线模式可定制。

Remarks:


- 1.The dimension parameters are for reference only, subject to the user's actual working conditions;
- 2.Tail wiring mode can be customized.

降额曲线 The derating curve

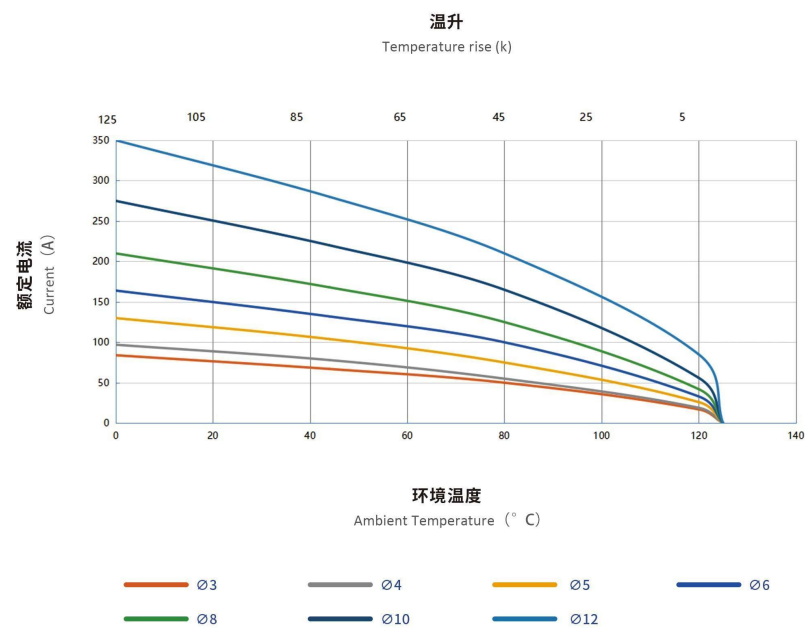

降额曲线—开槽端子

Derating curve of slotted terminals

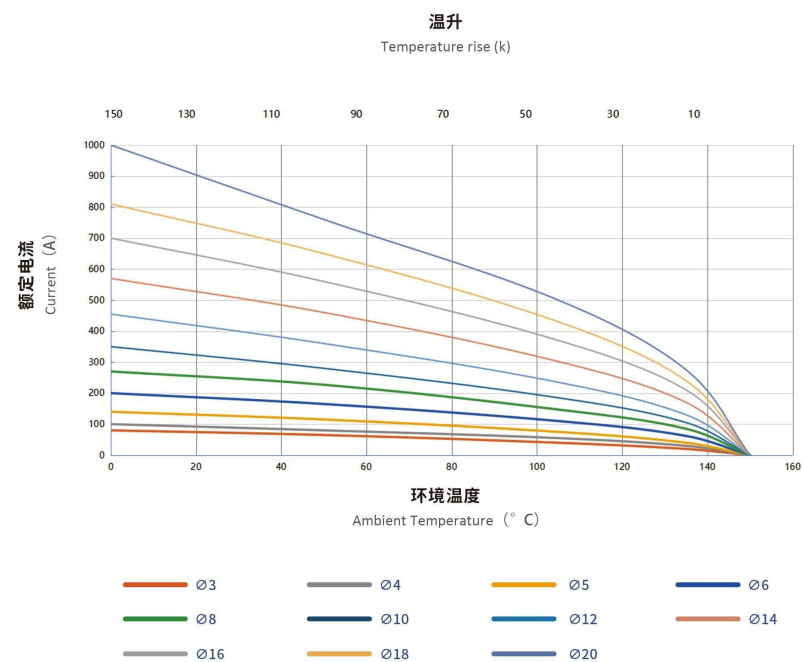

降额曲线—片簧端子

Derating curve of sliced terminals